



INFERNO BLITZ – ASSEMBLY INSTRUCTIONS & OWNERS MANUAL

Congratulations on your purchase of the Inferno Blitz 150lb Compound Crossbow Package! Thank you for purchasing our product, we hope you have many years of enjoyment from our high quality crossbow package. This is a precision unit and should be treated with care and maintained properly for peak performance.

IMPORTANT – Please inspect your package contents carefully to ensure that the following items are included in the box.
(Phillips screwdriver required – NOT included)

1. Inferno Blitz crossbow body
2. Inferno Blitz 150lb riser assembly
3. Quick detach quiver
4. Quiver hardware packet
5. Assembly tools
6. Rope cocking device
7. Rail lube
8. 4 – 16" Aluminum crossbow bolts
9. 4 x 32 Multi-reticle crossbow scope
10. Foot Stirrup


STOP – IN THE UNLIKELY EVENT YOU ARE MISSING ANY OF THESE PARTS CALL ARROW PRECISION, LLC
IMMEDIATELY (610) 437-7138 or Email sales@arrow-precision.com for immediate assistance.

FOR IMMEDIATE ASSISTANCE. DO NOT RETURN PRODUCT TO PLACE OF PURCHASE PLEASE CALL US DIRECTLY FOR SERVICE.




ASSEMBLY INSTRUCTIONS:

Step 1: Attach cable slide to cables as shown.

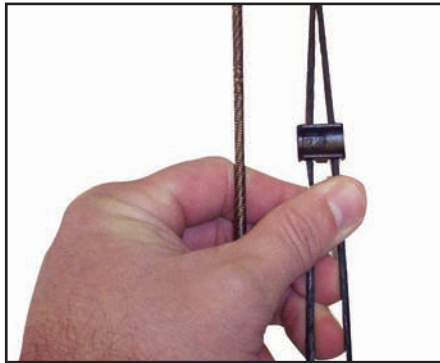

Step 2: Begin to assemble stock and riser assembly by positioning the bow string on the top of the rail and inserting the cable slide into position inside the rail to protect the cables from undue wear. **FAILURE TO USE THE CABLE SLIDE WILL RESULT IN CABLE DAMAGE** and will not be covered by the warranty. The profile of the cable slide is designed to match the profile of the aluminum rail of the crossbow and will protect the cables.

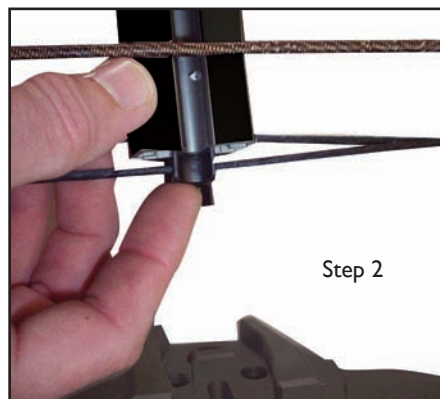


Step 3: Position the riser assembly and the body/stock together and prepare the nose bolt and washer for installation. It is not necessary to try and force the stock and riser together, due to the precision machining and tight tolerance of the joint simply push the two pieces together so that they are properly aligned to be bolted together, and using the Allen key begin to tighten the nose bolt. The stock/body and riser will begin to cinch together as the nose bolt is tightened. Continue to tighten until the two pieces are securely tightened.



Step 4: Attach foot stirrup. With the crossbow still flipped over, insert the foot stirrup into the riser with the two notched areas on the foot stirrup facing toward the grub screws. Please note, it may be necessary to loosen the grub screws on the riser in order to insert the foot stirrup fully into position. Tighten both of the grub screws as shown in the photo.




Step 5: Attach quiver mount found in the quiver mount hardware packet to the underside of the riser using the 2 counter sink Allen screws provided in the quiver hardware packet as pictured.

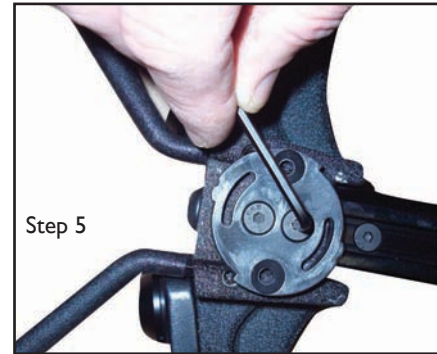


Step 6: Attach the quiver bracket with latch onto the quiver using the 2 wood screws. You will need a Phillips screwdriver to accomplish this. The latch is shown in the open position ready to mount the assembled quiver onto the crossbow..



Step 7: Attach the quick detach quiver to the quiver mounting bracket using a twisting motion. The quiver should be at a diagonal angle in order to properly seat on the quick detach bracket prior to twisting into the fixed position.

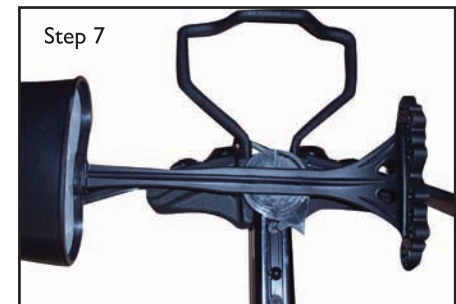

Step 8: Prepare to mount your 4x32 Multi Reticle Scope. When using a multi-reticle scope we recommend that you secure the weaver scope base in the fixed position by securing the set screws as pictured. Please make sure your scope base is in the level position prior to tightening down the set screws. At this point, you will not utilize the knob for adjusting elevation and only use the different crosshairs on your scope for different yardages.

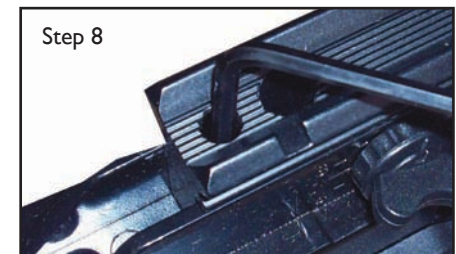

Step 9: Loosen the clamps on the scope mount and align the crossbar on the clamps with the slots on the weaver style base and tighten down as shown.



FINAL ADJUSTMENTS TO YOUR CROSSBOW

MARK YOUR STRING:

In order to achieve the highest level of accuracy it is recommended that you take the time to mark your string to ensure that you are cocking the bow in a consistent manner. Due to the high draw weight involved in cocking the bow it is easy to cock the crossbow off center. Failure to cock the crossbow squarely and with consistency will result in poor accuracy. Simply mark the string with a permanent marker or other means to visibly ensure the bow is being cocked properly.



IMPORTANT: LUBRICATE THE STRING SERVING AND RAIL AT THIS TIME. FAILURE TO DO SO WILL RESULT IN EXCESS FRICTION, THE STRING SERVING BURNING AND WEARING OUT PREMATURELY

COCKING THE CROSSBOW

The best way to cock the Inferno Blitz crossbow is through the use of the included rope cocking device. To use the rope cocking device, simply thread one side of the handle and one hook through the thumb hole located on the synthetic stock as shown. Continue to then place one hook on the string on each side of the flight track. This will provide the fulcrum

point which will provide you with the 50% reduction in draw weight. Once this is accomplished simply grasp the molded handles through the straps, hold crossbow to a level surface using the foot stirrup and pull the string back until it latches in the trigger. Using this method, the draw weight will be reduced by 50% and the string will cock in a consistent manner each time.



To manually cock the crossbow follow the instructions below.

Place the foot stirrup on the ground in a flat and stable area. Insert your foot into the stirrup and securely hold the crossbow down to the ground with the weight of your body. With one hand on each side of the flight track, securely grasp the string as close as possible to the flight track. Begin drawing the string back towards the trigger mechanism, being sure to keep the string in contact with the flight track. Continue pulling the string back into position, being sure to keep the alignment straight. The trigger latch and safety will automatically engage when you have reached the back of the trigger housing.

Once cocked, the marks should be visible in the same position on each side of the trigger mechanism. You are now ready to load the crossbow with an arrow.

Warning do not dry fire (fire without an arrow) your crossbow.

We strongly urge you to only unload your crossbow by shooting it at a safe target. Attempting to uncock the string by hand is dangerous and may cause damage to the crossbow, and/or physical harm, as well as void your warranty. Do not attempt this.



When loading an arrow into your crossbow, be sure to check that the arrow is in good condition is free from defects and is straight and true. It should lay in the flight track without any bends or other issues that would cause erratic flight of the arrow. Insert the arrow onto the flight track with the index fletch (odd colored fletch) down in the groove of the flight track as pictured.

It is **IMPERATIVE** that the arrow is seated ALL the way back with the half moon nock cradled against the string. If this is not done the string may jump the arrow or may go under the arrow

– which would be equivalent to dry firing the bow (Firing without an arrow – this would void your warranty and damage could occur)



FIRING THE CROSSBOW

With the arrow correctly loaded and an appropriate target is in position with adequate backstop provided release the automatic safety and pull the trigger to fire the crossbow. We recommend you start sighting in your bow at a maximum distance of 10 yards in order to be sure that your aim is on target. Once the unit is sighted in at close range, further distances may be attainable.

RECOMMENDED ARROWS

The Blitz crossbow includes 4 - 16" Aluminum 2219 shaft size with 100 grain practice points. These arrows are appropriate for target shooting and hunting provided the tips are changed out and replaced with proper hunting tips of the same grain weight. If expendable broadheads are legal in your area then we recommend they be utilized. You may alter your arrow set up, if desired, utilizing either 20" Carbon arrows with 100 grain tips or 20" aluminum available through your Inferno dealer. Minimum arrow and tip weight of 350 grains is required.

Thank you for your purchase. We wish you great success in your hunting and target shooting pursuits!



Basic Sighting of Your Scope

Your Blitz crossbow includes a 4x32 multi-reticle crossbow scope, we suggest beginning to sight in your crossbow at no more than 10 yards to ensure that you are able to hit the target easily to avoid loss or damage of your arrows. You will be sighting in the TOP LINE on your scope for the shortest distance. Using an appropriate target designed for crossbows, begin by first checking to see if you will hit the target with your shot, similar to bore sighting aim at the target and verify that you will hit the intended target. It is a good idea to use some sort of rest to ensure that you are aiming consistently. Take your first shot aiming at the center bullseye, and examine where on the target the arrow has hit.

Depending on where the shot hit you will need to adjust the windage knob (Left and right) and elevation (up and down) knob on the scope in the direction indicated on the scope adjustment knobs to make the correction. Continue repeating the process until you are zeroed in at 10 yards and then begin to move slowly further away from the target to your desired first yardage making adjustments to windage and elevation as necessary. The other lines below the top line will offer you additional yardage sight points, the lower the line the further the distance. These distances will depend on your initial yardage sighting of the top line, and also depend on your arrow configuration (arrow shaft length, size and weight of tip).

#106



Optional Accessories:

#185 Blitz String	\$29.99
#106 20" Carbon Arrows 6 Pack	\$39.99
#180 Crossbow Case	\$49.99
#122 Crank Cocking Device	\$129.99
#129 Rail Lube 3 Pack	\$7.99
#103 Upgraded Illuminated 4x32 Scope	\$99.99
#121 3-Dot Red Dot	\$49.99

#180



#185



#129



#122



#103



Arrow Precision, LLC
1619 W Washington Street
Allentown, PA 18102
sales@arrow-precision.com

Tel: 610 437 7138
Fax: 610 437 7139
www.arrow-precision.com

Arrow Precision, LLC

Inferno Crossbows and Youth Archery Set

One Year Limited Warranty

Manufacturer warrants to be free from defects in material and workmanship under normal use and service for 1 year from date of purchase. It does not cover damage resulting from abuse or misuse, repairs or alterations performed by other than the manufacturer or authorized service center, or damage occurring in transit. Not covered are strings, cables, and other items which require periodic replacement. Damage resulting from dry firing (firing unit without an arrow), whether intentional or accidental; including instances where arrow is not seated properly resulting in damage to the limbs, cables, wheels, string, etc.

For warranty service, unit should be well packed to avoid damage in transit, including a description of the difficulty, and shipped postage prepaid to Arrow Precision, LLC at the address below. Arrow Precision, LLC will repair or replace at no charge and return postage prepaid. For customers living outside the United States, Arrow Precision, LLC will provide standard warranty service. However, inbound & outbound shipping cost is the responsibility of the consumer. If failure was caused by misuse, alterations, accident, or abnormal conditions of operation, an estimate for repairs will be submitted for your approval prior to work being performed.

Include a copy of the original sales receipt, along with the form below and mail to Arrow Precision, LLC in order to register your product and activate your warranty.

If you have questions concerning this product or warranty, contact Arrow Precision, LLC, asking for warranty assistance.

Arrow Precision, LLC
1619 W Washington Street
Allentown, PA 18102
Telephone (610) 437-7138
Fax (610) 437-7139
Email: Sales@arrow-precision.com
www.arrow-precision.com

Model Name _____ Date Purchased _____

Last Name _____ First Name _____

Street Address _____

City _____ State _____ Zip Code _____

Email: _____

Dealer Name _____ City _____ State _____

Price Paid _____ Intended Use _____

(hunting, target, other)